

Example for read out log book of Soft Starter 3RW44

Read out log book

Required components

Soft Starter type 3RW44...-....

PC


Soft Starter ES e.g. 14days Trial-Version Link
<http://support.automation.siemens.com/WW/view/en/28323168>

Download cable: 3UF7940-0AA00-0

Eventually USB-RS232 adapter if PC has only USB interfaces:
3UF7946-0AA00-0


Connect download cable 3UF7940-0AA00-0 between PC and Soft Starter 3RW44...-....
Then start parametering software Soft Starter ES 2007

Read out log book

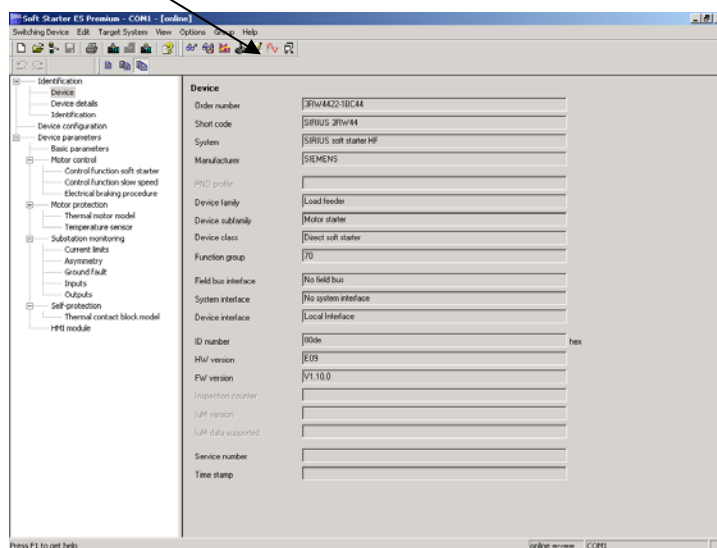


Example for read out log book of Soft Starter 3RW44

The log book opens:

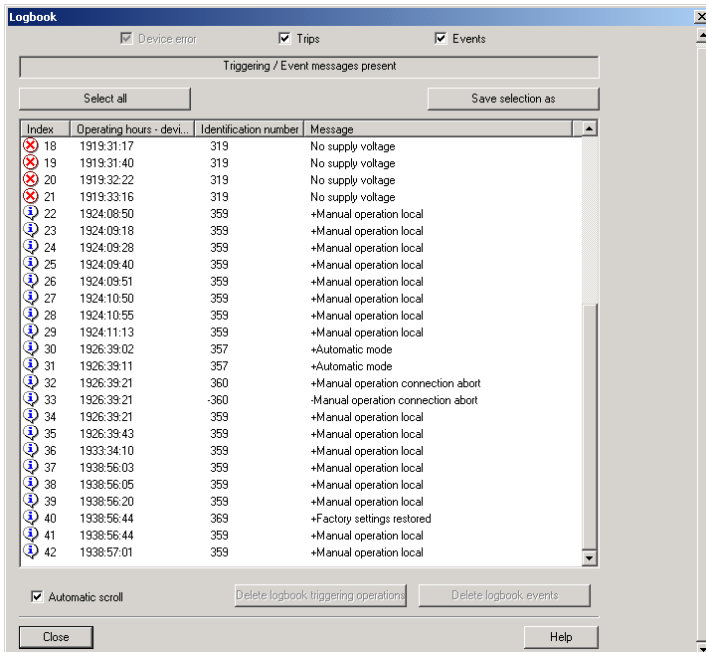


Press Button „Select all“

after that „Save selection as“

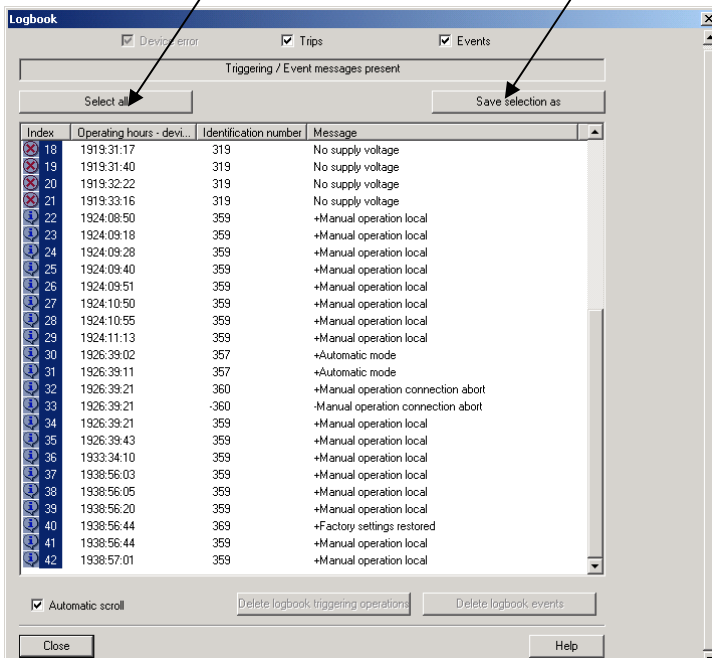

Example for read out log book of Soft Starter 3RW44

Select file name and save the file !

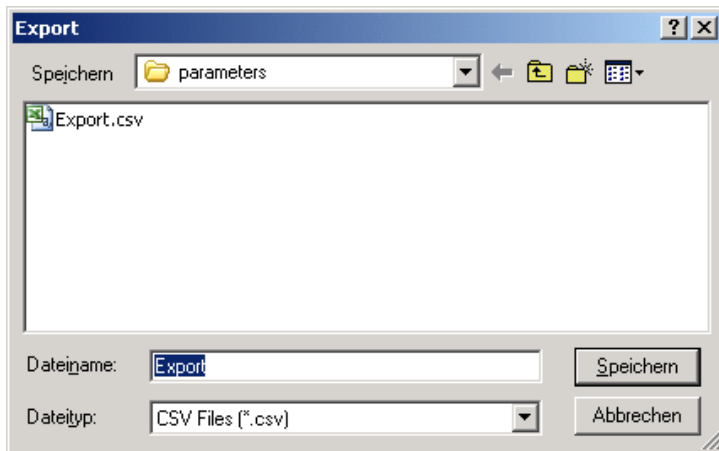

EXCEL file opens and log book entries are displayed

The screenshot shows Microsoft Excel with the file 'Export.csv' open. The spreadsheet contains the following data:

Index	Class	Operating hours - device	Identification number	Message
1	Triggering operations	1882:06:04	305	Je lower limit value violation
2	Triggering operations	1882:08:58	1409	Phase failure L1
3	Triggering operations	1882:07:28	1409	Phase failure L1
4	Triggering operations	1879:01:56	324	Temperature sensor overload
5	Triggering operations	1879:02:21	324	Temperature sensor overload
6	Triggering operations	1879:02:24	324	Temperature sensor overload
7	Triggering operations	1879:02:50	324	Temperature sensor overload
8	Triggering operations	1880:08:11	1409	Phase failure L1
9	Triggering operations	1880:38:24	319	No supply voltage
10	Triggering operations	1894:32:01	319	No supply voltage
11	Triggering operations	1894:32:04	319	No supply voltage
12	Triggering operations	1897:30:10	319	No supply voltage
13	Triggering operations	1897:33:56	319	No supply voltage
14	Triggering operations	1897:34:38	1409	Phase failure L1
15	Triggering operations	1918:45:23	319	No supply voltage
16	Triggering operations	1918:57:38	319	No supply voltage
17	Triggering operations	1919:31:03	319	No supply voltage
18	Triggering operations	1919:31:17	319	No supply voltage
19	Triggering operations	1919:31:40	319	No supply voltage
20	Triggering operations	1919:32:22	319	No supply voltage
21	Triggering operations	1919:33:16	319	No supply voltage
22	Events	1924:08:50	359	Manual operation local